



# AC600 High Gain Wireless Dual Band USB Adapter



Archer T2U Plus








# Highlights


### AC600 Dual Band Wi-Fi

The Archer T2U Plus receives Wi-Fi signals on two separate bands. Supporting 256QAM technology increases 2.4GHz data rate from 150Mbps to 200Mbps for 33% faster performance. Choose the 2.4GHz for surfing and social media, and 5GHz for up to 433Mbps for HD streaming and lag-free gaming.

## Increased Range with High Gain Antenna

A high gain antenna reaches your router from farther with more precise directional range, sustaining faster and more stable wireless connections.

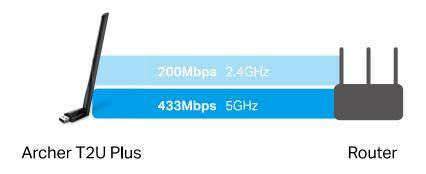


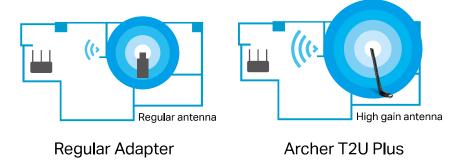

# Highlights

## Adjustable Multi-Directional Antenna

Rotate and adjust the antenna in the multi-direction to improve using experience in different environments.

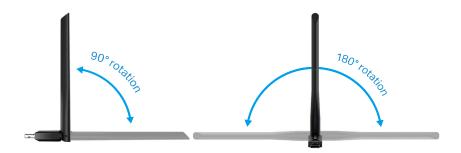

## **Features**



- High-Speed Wi-Fi 200Mbps on 2.4GHz and 433Mbps on 5GHz wireless speeds are ideal for HD streaming video, lag-free gaming and large file downloads
- 256QAM Support Increases the 2.4GHz data rate from 150Mbps to 200Mbps, delivering 33% faster performance
- 802.11ac Support Wi-Fi technology that is 3 times faster than 802.11n



## Reliabitlity

- Dual Band 2.4GHz and 5GHz band provide flexible connectivity, giving your devices access to the latest dual-band Wi-Fi router for faster speed and extended range
- Backwards Compatibility Supports routers utilizing 802.11 a/b/g/n Wi-Fi standards



 Easy Installation – A friendly user interface utility on a CD for simple installation



 High-Gain Antenna – A 5dBi high-gain antenna greatly enhances the reception and transmission signal strength of the USB adapter



## Security

 Active Defense – WPA/WPA2 encryption provides your Wi-Fi network with advanced protection against security threats

# **Specifications**

#### Wireless

- Wireless Standard: IEEE 802,11b/g/n 2,4GHz, IEEE 802,11a/n/ac 5GHz
- Frequency: 2,4GHz, 5GHz
- · Wireless Mode: Ad-Hoc / Infrastructure Mode
- · Wireless Security: WEP, WPA/WPA2, WPA-PSK/ WPA2-PSK
- · Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM, 256-QAM

### Hardware

- · Interface: USB 2.0
- LED: Status
- · Antenna: 1 External High Gain 5dBi Antenna
- Dimensions (when the antenna is vertical): 2.28×0.71×6.83 in (57.8 × 18 × 173.4mm)

#### Others

Package Contents

AC600 High Gain Wireless Dual Band USB Adapter

Quick Installation Guide

Resource CD

Certification

FCC, CE, RoHS

· System Requirements

Windows10/8.1/8/7/XP, Mac OS X 10.9-10.14

Environment

Operating Temperature:  $0^{\circ}C \sim 40^{\circ}C$  ( $32^{\circ}F \sim 104^{\circ}F$ ) Storage Temperature:  $-40^{\circ}C \sim 70^{\circ}C$  ( $-40^{\circ}F \sim 158^{\circ}F$ ) Operating Humidity:  $10\% \sim 90\%$  non-condensing Storage Humidity:  $5\% \sim 90\%$  non-condensing







For more information, please visit

https://www.tp-link.com/en/products/details/Archer-T2U-Plus.html

or scan the QR code left

Specifications are subject to change without notice, TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2019 TP-Link Technologies Co., Ltd. All rights reserved.

"Maximum wireless signal rates are the physicial rates are the physicial rates are the physicial rates are the physicial rates are will provide a report of the provided from IEEE Standard 802.11 specifications, Actual wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

\*To ensure compatibility, you may need to update the adapter's drivers after an OS update. You can find our latest drivers in the download center at tp-link.com/en/download-center.

www.tp-link.com