




# Product data sheet

Power tools for trade & industry

Tile Laser

## GTL 3

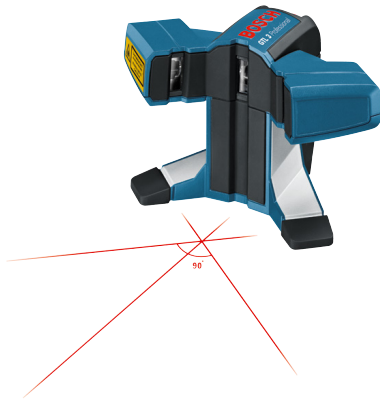

Fast tile laying due to additional line at 45°

### The most important data

Working range	20 m
Dust and splash protection	IP 54

**Order number** 0 601 015 200

[> More product information](#)

## Technical data

### Technical data

Laser diode	635 nm, < 1 mW
Operating temperature	-10 – 50°C
Storage temperature	-20 – 70°C
Laser class	2
Working range	20 m
Working range with target plate	20 m
Angular accuracy (between 0 – 90° angle)	± 0,2 mm/m
Dust and splash protection	IP 54
Power supply	4 x 1.5 V LR6 (AA)
Operating time (max.)	18 h in 2-line mode
Weight, approx.	0.44 kg
Projection	3 lines



**BOSCH**

Invented for life

# Product data sheet

Power tools for trade & industry

---

## Advantages:

- In addition to the two laser lines at a 90° angle, it projects a third line at 45° for precise and fast alignment and laying of wall and floor tiles
- High accuracy of 0.2 mm/m
- Compact and lightweight design for optimum ease of use

