


TECHNICAL DATA

# Fluke BHT190 Break-Out Adapters for Industrial Bus Connections

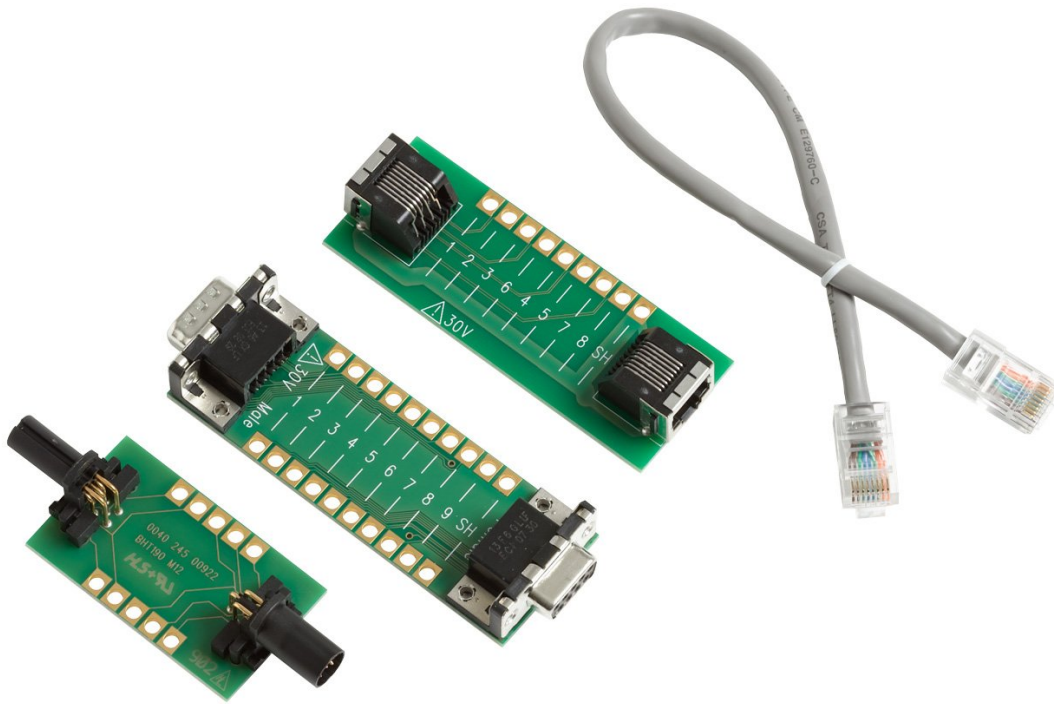

## Key features

Set contains:

- Break-out adapter DB-9, male-to-female. Gives access to pins 1 thru 9 and shield.
- Break-out adapter M12, with cables, male-to-female. Gives access to pins 1 thru 5.
- Break-out adapter RJ-45, female-to-female with patchcable (patchcable not shown on photo). Gives access to pins 1 thru 8 and shield.

## Product overview: Fluke BHT190 Break-Out Adapters for Industrial Bus Connections

Set of break-out adapters for the three most common industrial bus connection systems M12, DB-9 and RJ-45. Each board works as a straight-through connection for the bus cable and gives access to the individual wires and pins of the connector system for hooking up probes.


## Specifications: Fluke BHT190 Break-Out Adapters for Industrial Bus



# Connections

Specifications	
Max. voltage	30 V rms, 42 V peak, between any connection and between connections and ground.

## Ordering information

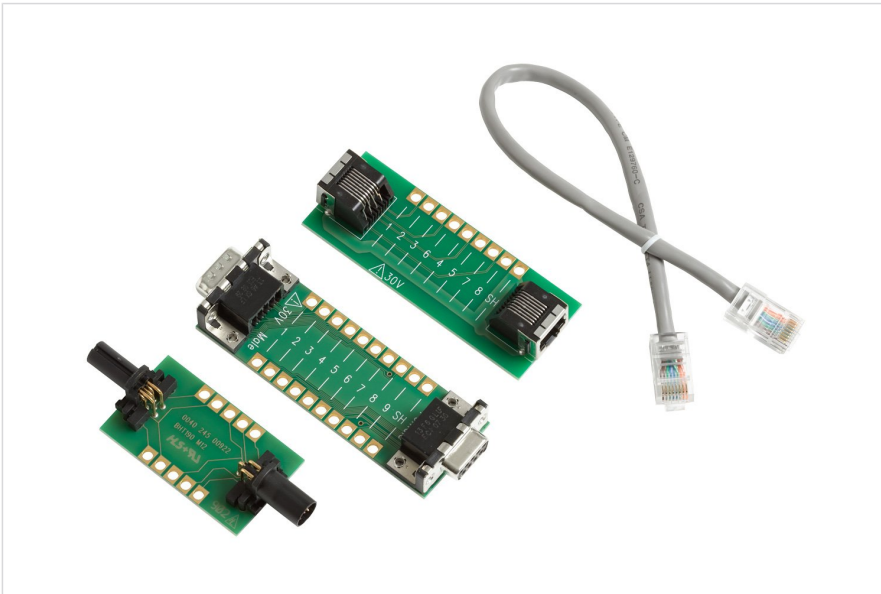

### Fluke BHT190

Set contains:

- Break-out adapter DB-9, male-to-female. Gives access to pins 1 thru 9 and shield
- Break-out adapter M12, with cables, male-to-female. Gives access to pins 1 thru 5
- Break-out adapter RJ-45, female-to-female with patchcable (patchcable not shown on photo). Gives access to pins 1 thru 8 and shield

**Fluke.** *Keeping your world up and running.®*

**Fluke Europe B.V.**

P.O. Box 1186  
5602 BD Eindhoven  
The Netherlands  
[www.fluke.com/en](http://www.fluke.com/en)

©2023 Fluke Corporation. All rights reserved.

Data subject to alteration without notice.

07/2023

**For more information call:**

In Middle East/Africa  
+31 (0)40 267 5100

**Modification of this document is not permitted  
without written permission from Fluke Corporation.**