

**TECHNICAL DATA** 

# Fluke VPS510-G ScopeMeter® Compact Probe



## **Key features**

- Ideal for small electronics applications
- Compact size designed for lower voltage applications
- Double insulated, 300 V CAT III rated
- 10:1 voltage ratio and 500 MHz bandwidth
- Available in red, blue, grey, and green

### Product overview: Fluke VPS510-G ScopeMeter® Compact Probe

Use the Fluke VPS510-G (Grey) Compact Voltage Probe with the Fluke 190 Series III and Series II Portable Oscilloscopes or with the MDA-500 Series Motor Drive Analyzers. These double insulated compact probes offer a 10:1 voltage ratio, and 500 MHz bandwidth making them ideal for small electronics applications. For industrial applications consider Fluke VPS410-II-G Voltage Probes or VPS421 Series High Voltage Probes.

### Specifications: Fluke VPS510-G ScopeMeter® Compact Probe

Specifications*	
Attenuation	10:1
Bandwidth	500 MHz
Max. input voltage	CAT III 300 V
Max. voltage to ground	CAT III 300 V




10 ΜΩ
11.5 ± 1 pF
1025 pF
1.2 m (3.9 ft)
IEC / EN 61010-031 UL 61010-031 CSA C22.2 No. 1010.2.031
2000 m
2
II (double insulation)

<sup>\*</sup>Specification of probe is valid only when used with Fluke ScopeMeter 190-xxx models and MDA-500 series.



## **Ordering information**

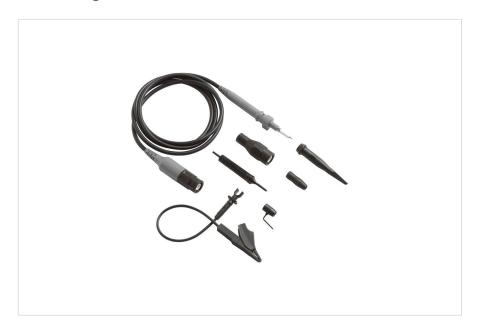

#### Fluke VPS510-G

ScopeMeter® Compact Probe for electrical applications

- (1) Grey voltage probe
- (1) Black hook clip for probe tip
- (1) Black ground lead with mini alligator clip
- (1) Ground spring for probe tip
- (1) Insulation sleeve for probe tip
- (1) BNC to probe tip adapter
- (1) Adjustment tool



### Fluke. Keeping your world up and running. ${\it \$}$

Fluke Europe B.V.
P.O. Box 1186
5602 BD Eindhoven
The Netherlands
www.fluke.com/en
©2023 Fluke Corporation. All rights reserved.
Data subject to alteration without notice.
07/2023

For more information call: In Middle East/Africa +31 (0)40 267 5100

Modification of this document is not permitted without written permission from Fluke Corporation.