



POWERWALL - IP20

51.2V 280Ah

W15-5C

8 Years Warranty

6000+ Cycles

New BMS Technology




Communicate with all INVERTERS

IP20 Ingress Protection

Bluetooth Enabled

Easy Installation

Long Designed Life



www.sespower.com.pk

Specifications

BATTERY SPECIFICATION

Rated Voltage		51.2V
Rated Capacity		280Ah
Rated Capacity - WATTS		14336WH
Discharge Current (Max.)		200A
Discharge End Voltage		45.6V
Charge Current (Recomm.)		20A ~ 50A
Charge Current (Max.)		200A
Charge Voltage		56.16V
Dimensions	Width	800 mm
	Depth	500 mm
	Height	243 mm
Typical Weight		128 Kg

Ports


Status Indicators	SOC / ALM / RUN
Communication Ports	CAN / RS485
Communication in Parallel	Max 8 modules in parallel
Reset Key	Available
Terminal Size	M8 (Screw size)
LCD Screen	N/A

Operation Environments

Temperature Range	Discharge	-20 to + 60 °C
	Charge	0 to + 60 °C
	Storage	0 to + 40 °C
Temperature Recommendation	Discharge	+15 to + 35 °C
	Charge	+15 to + 35 °C
	Storage	+15 to + 30 °C
Humidity	5% to 95%	

Warranty: 5 Years Complete Warranty + 3 Years Free Service

W15-5C

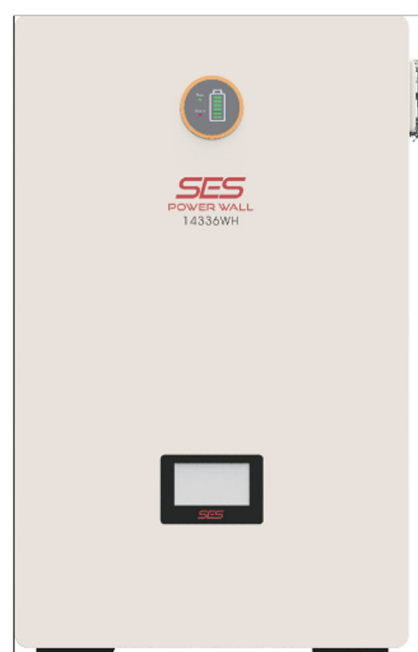

51.2V 280Ah
6000+ Cycles
8 Years Warranty