




POWERWALL 51.2V 200Ah

5 Years Warranty

6000+ Cycles

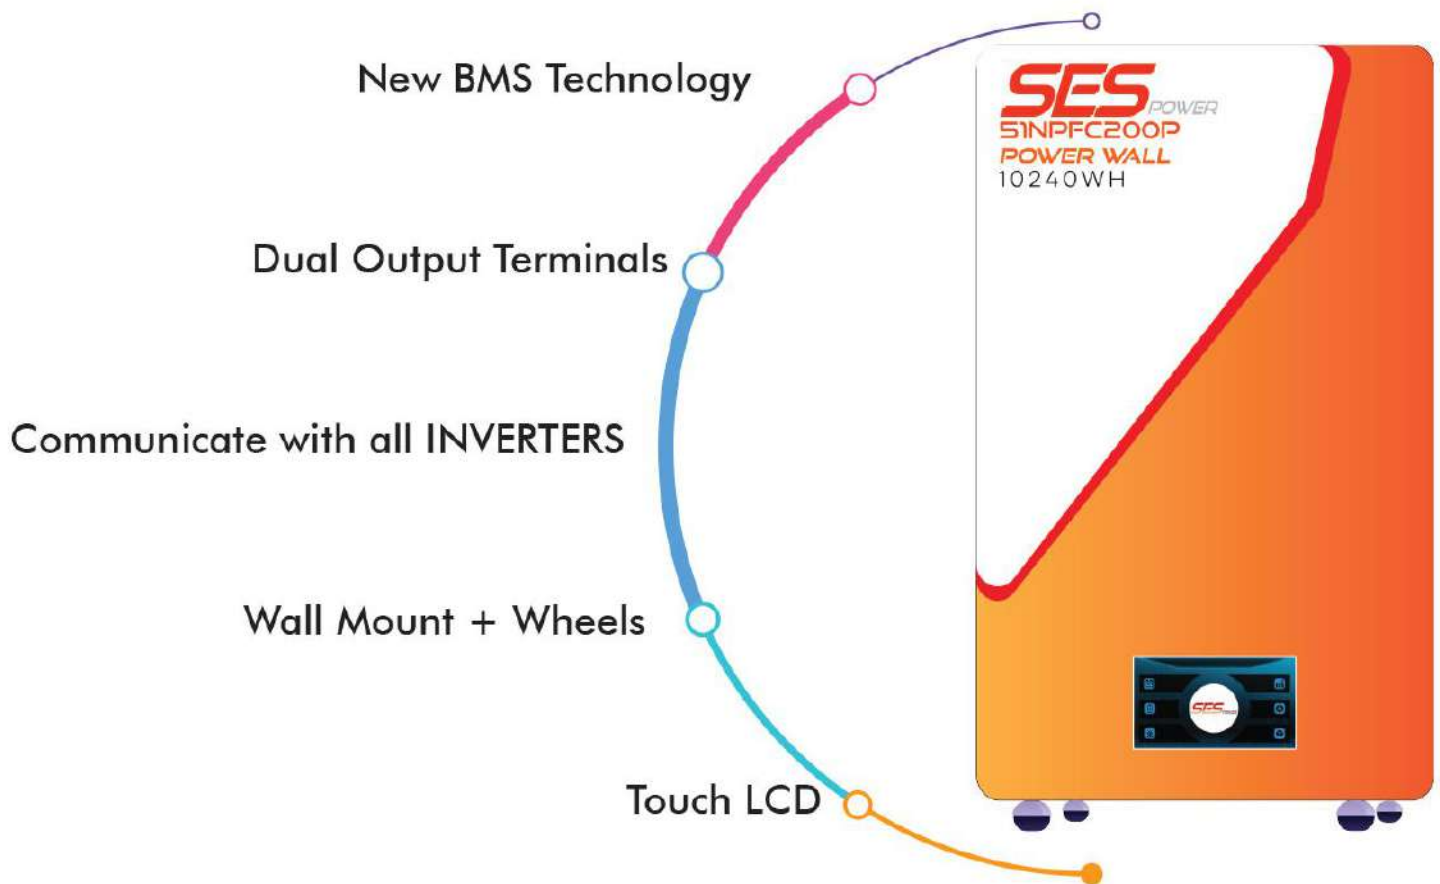



Specifications

BATTERY SPECIFICATION		POWERWALL - 16S
Rated Voltage		51.2V
Rated Capacity		200Ah
Rated Capacity - WATTS		10240WH
Discharge Current (Max.)		200A
Discharge End Voltage		47V
Charge Current (Recomm.)		20A ~ 60A
Charge Current (Max.)		100A
Charge Voltage		58.4V
Dimensions	Width	480 mm
	Depth	250 mm
	Height	652 mm
Typical Weight		94 Kg
Ports		
Status Indicators		SOC / ALM / RUN
Communication Ports		CAN / RS485
Communication in Parallel		Max 8 modules in parallel
Reset Key		Available
Terminal Size		M8 (Screw size)
LCD Screen		Touch Screen
Operation Environments		
Temperature Range	Discharge	+20 to + 60 °C
	Charge	0 to + 60 °C
	Storage	0 to + 40 °C
Temperature Recommendation	Discharge	+15 to + 35°C
	Charge	+15 to + 35°C
	Storage	+15 to + 30°C
Humidity		5% to 95%



51.2V 200Ah
6000+ Cycles
5 Years Warranty

