


NEW FROM SOLAX

X3-FORTH

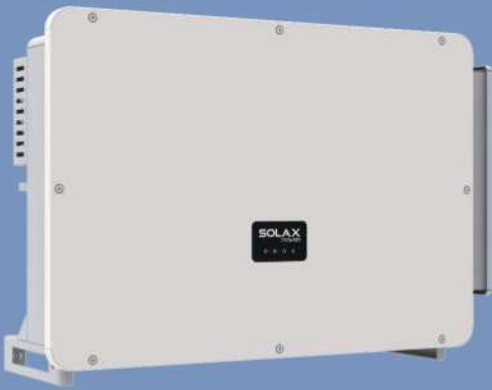

X3-FORTH

75kW/80kW/100kW
120kW/125kW/136kW/150kW

Features

More energy harvest

- Maximum efficiency up to 99%
- 180~1000Vdc MPPT voltage range
- Maximum 12 MPPTs, 2 strings per MPP tracker
- 150% PV oversizing input, 110% overloading output
- Maximum 32A MPPT current

Safety & Reliability

- IP66 protection level
- AFCI protection (Optional)
- AC terminal temperature detection
- Both AC&DC SPDs(Type II) inside, Type I+II SPD is optional

Intelligence for easy maintenance and economy

- Built-in export power control
 - Remote setting and upgrading
 - 24 hours operation monitoring
 - Smart I-V Curve Diagnosis supported
 - Night-time reactive power compensation
 - Aluminium AC cable connection available
 - Power line communication (PLC)(Optional)
 - Fuse free design with smart string current monitoring
 - Smart air cooling technique results in long lifetime of fans
 - Advanced heat dissipation technology makes the system more than 5% lighter and smaller
-

X3-FORTH (THREE PHASE)

X3-FTH-75K X3-FTH-80K X3-FTH-100K X3-FTH-110K X3-FTH-120K X3-FTH-125K X3-FTH-136K-MV X3-FTH-150K-MV

DC INPUT									
Max. PV array input power [kWp]	120	120	150	165	180	188	204	225	
Max. PV input voltage [V]	1100								
Nominal input voltage [V]*	580/600	580/600	580/600	580/600	580/600	580/600	730/785	730/785	
Startup voltage [V]	200								
MPP tracker voltage range [V]	180-1000								
No. of MPP trackers	9	9	9	9	12	12	12	12	
Strings per MPP tracker	2								
Max. PV input current per MPPT [A]	32								
Isc PV Array Short Circuit current per MPPT [A]	46								
AC OUTPUT									
Rated AC output power [kW]	75	80	100	110	120	125	136	150	
Rated AC output current [A]*	113.7/108.7	121.3/116	151.6/145	166.7/159.5	181.9/174	189.4/181.2	157.1/145.4	173.2/160.4	
Max. AC output apparent power [kVA]	75	88	110	121	132	132	149.6	165	
Max. AC output current [A]**	113.7/108.7	133.4/127.6	166.7/159.5	183.4/175.4	200/191.3	200/191.3	172.8/160	190.6/176.5	
Nominal AC voltage [V]	220/380, 230/400, 3/N/PE, 3/PE						500/540,3P3W+PE		
AC voltage range [V]**	304 ~ 480						425 ~ 594		
Nominal AC frequency/AC frequency range [Hz]**	50/60; ±5								
THDi (Rated power) [%]	<3								
Power Factor range	0.8 leading ~ 0.8 lagging								
SYSTEM DATA									
MPPT efficiency [%]	99.9								
Max. efficiency [%]	98.6	98.6	98.6	98.6	98.6	98.6	99.0	99.0	
Ingress protection	IP66								
Operating ambient temperature range [°C]	-30~+60 (Derating above 45)								
Max. operation altitude [m]	4000 (Derating above 3000)								
Relative humidity [%]	0~100								
Dimensions [WxHxD] [mm]	985x660x327.5								
Weight [kg]	83	83	83	83	87	87	87	87	
Cooling concept	Smart fan cooling								
Communication interfaces	RS485 / USB / DRM / PLC(Optional)								
Optional monitoring dongle	Pocket WiFi/LAN/4G								
Display	LCD(16x2, optional)/LEDx4								
PROTECTION									
Over/under voltage protection	YES								
DC isolation protection	YES								
Grid monitoring	YES								
DC injection monitoring	YES								
Residual current detection	YES								
Anti-islanding protection	YES								
String fault detection	YES								
SPD (DC/AC)	Type II / Type II								
Arc-fault circuit interrupter(AFCI)	Optional								
AC terminals over temperature detection	YES								
AC auxiliary power supply(APS)	Optional								
Power line communication(PLC)	Optional								
STANDARD									
Safety	IEC/EN 62109-1; IEC/EN 62109-2; NB/T 32004								
EMC	IEC/EN 61000; NB/T 32004								
Certification	EN 50549; AS4777.2; VDE4105; IEC 61727; IEC 62116; IEC 61683; IEC 60068; EN 50530; NB/T 32004								

* The two data refer to different grid voltage 220V/230V or 500V/540V

** The AC voltage and the frequency range may vary from different country codes

V2.8 Information may be subject to modify without notice.650.00001.00