

TD2220-2

22"/55.9cm (21.5"/54.6cm viewable) Full HD 1080p Optical Touch Monitor

Intuitive Multi-Touch Design



Overview

The 22" (21.5"/54.6cm viewable) ViewSonic® TD2220 is a multi-touch Full HD LED backlit monitor with 1920x1080 resolution, DVI & VGA inputs and VESA mountable design. It has 20,000,000:1 MEGA Dynamic Contrast Ratio for sharp crisp images and Eco-mode for up to 40%* energy savings come standard in the new 22" (21.5"/54.6cm viewable) offering. Perfect for both commercial and consumer applications, the TD2220 supports the USB HID Touch driver and supports Windows® 8. The TD2220 is a one-stop solution for your multi-touch monitor needs.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

ViewSonic®
See the difference™ 

Multi-touch Screen with 8H Surface Hardness

Simply touch, drag, resize and manipulate, photos, documents or web pages, just like on your favourite mobile devices! 8H scratch resistant surface hardness ensures a consistent high quality touch experience and durability.



Full HD 1080p Display with 1920x1080 Resolution

The 22" (21.5"/54.6cm viewable) Full HD monitor supports imaging intensive commercial applications, video and image editing and entertainment. 20,000,000:1 MEGA Dynamic Contrast Ratio provides a crisp image with high level details.

OptiSync digital/analog inputs expand your connectivity

The TD2220 supports Windows® 8 touch function and boasts USB HID (Human Interface Device) for plug-and-play. The TD2220 can be connected through USB for instant two-point touch operation and for experiencing easy navigation through intuitive touch operation. Two USB ports for additional connectivity for peripherals and electronic devices. Multi-mode input technology supports both digital (DVI) and analog (VGA) signals for compatibility and configuration flexibility.



ENERGY STAR® and EPEAT Silver certified


The TD2220 is TCO Compliant and environmentally sound with Energy-saving LED backlight and Eco-mode. You can save up to 40%* in your energy cost comparing to a regular 22" monitor.



For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

ViewSonic®
See the difference™ 

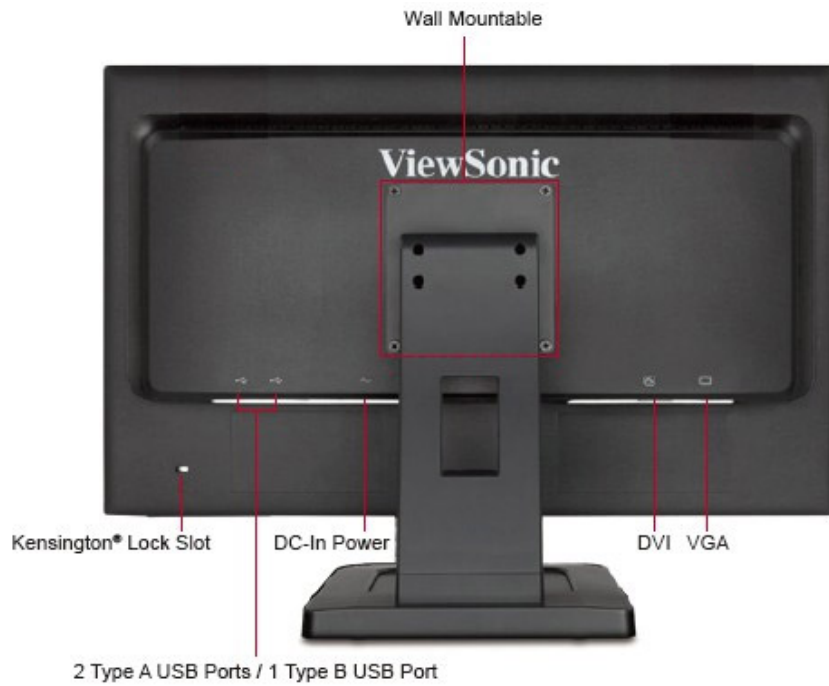

Technical Specifications

| | | |
|----------------|------------------------|-------------------------------------------------------------------------------|
| LCD | Type | 22" (21.5"/54.6 viewable) Wide Color TFT Active Matrix LED |
| | Display Area | 18.8"/47.8cm horizontal x 10.6"/ 26.9 cm vertical; 21.5"/ 54.6 cm diagonal |
| | Optimum Resolution | 1920x1080 |
| | Contrast Ratio | 1000:1 (typ.) |
| | Brightness | 200 cd/m2 (typ.) |
| | Viewing Angles | 170° horizontal, 160° vertical |
| | Response Time | 5ms (typ.) |
| | Panel Surface | Anti-glare, hard-coating (8H) |
| | Dynamic Contrast Ratio | 20,000,000:1 |
| | Backlight | White-light LED |
| Backlight Life | 40,000 hours (min.) | |

| | | |
|--------------------|-----------|--------------------------------------|
| VIDEO INPUT | Analog | RGB analog (0.7 / 1.0 Vp-p, 75 ohms) |
| | Digital | DVI (TMDS, 100 ohms) |
| | Frequency | Fh: 24~83kHz, Fv: 50~76Hz |
| | Sync | Separate Sync |

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.



| | | |
|-----------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COMPATIBILITY | PC Mac® | PC compatibles (Windows® 7 Operating System) n/a |
| CONNECTOR | Analog Digital Power | 15-pin mini D-sub (VGA) DVI-D (with HDCP) Internal power board, 3-pin plug (CEE22) |
| ERGONOMICS | Tilt | 20°~5° |
| CONTROLS | OSD Front Panel | Auto Image Adjust, Contrast/Brightness, Input Select (D-SUB, DVI-D), Color Adjust (sRGB, Bluish, Cool, Native, Warm, User Color [R,G,B]), Information, Manual Image Adjust (H/V Position, Horizontal Size, Fine Tune, Sharpness, Dynamic Contrast, Response Time, Aspect Ratio, Eco-mode), Setup Menu (Language Select, Resolution Notice, OSD Position, OSD Timeout, OSD Background, Auto Power Off, Power Indicator), Memory Recall 1, 2, Down, Up, Power |
| POWER | Voltage Consumption Optimize Conserve | AC 100–240V (universal), 50 / 60Hz 26W (typ.) / 43W (max.) 21W (typ.) 18W (typ.) |
| DIMENSIONS | Physical With Stand Physical Without Stand Packaging | 511 x 635 x 240 mm / 20.11 x 14.37 x 9.45 in. 511 x 310 x 66 mm / 20.11 x 12.22 x 2.61 in. 570 x 427 x 214 mm / 22.44 x 16.81 x 8.43 in. |
| WEIGHT | Gross Net With Stand Net Without Stand | 6.45 kg / 14.22 lb. 4.92 kg / 10.85 lb. 3.96 kg / 8.73 lb. |
| REGULATIONS | | CE,CB, BSMI, PSB, SASO, C-tick, e-standby, KC, UL/cUL, FCC-B (including ICES003), UL CoC, Mexico Energy, GOST-R/Hygienic, UkrSEPRO, TCO 5.2, Erp, CCC, China Energy, ENERGY STAR®, EPEAT Silver, WEEE, RoHS, SVHC list |
| VESA® MOUNT | | 100mm x 100mm |
| OPERATING CONDITIONS | | |

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.



| | |
|-------------|-------------------------|
| Temperature | 32–104° F (0–40° C) |
| Humidity | 20–90% (non-condensing) |

ViewSonic® Limited Warranty



ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.

